

Trimco®

SEALS PRODUCT CATALOG

V. 11.10.23

2024

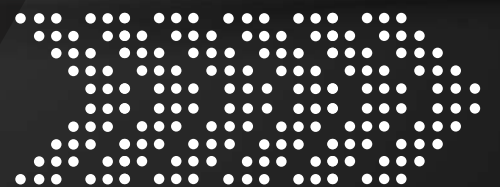


Table of Contents

01 About Us

02 Our Capabilities

03 Custom Parts

05 Seals Information

06 Technical Data Sheet

07 Featured Seals

08 Profile Specifications

09 Profiles Chart

11 Warranty

12 Contact Information

About Us

Trimco supplies industrial clients with quality plastic extrusion parts for a variety of applications.



We specialize in the lamination of tape and mylar onto flexible plastic and rubber extrusions.



We use original equipment approved polymers and 3M acrylic foam tape for outstanding performance and reliability.



Our in-house tool and design facility provides expert engineering from design concept through to the final product.



Our Products use



Acrylic Foam Tape

Our Capabilities

Polymers

- Plasticized Polyvinyl Chloride (PPVC or Flexible PVC)
- Unplasticized Polyvinyl Chloride (UPVC or Rigid PVC)
- Thermoplastic Vulcanate (TPV Foamed or Closed Cell)
- Thermoplastic Elastomer (TPE)
- Thermoplastic Polyolefin (TPO)
- Polypropylene (PP)
- Acrylonitrile Butadiene Styrene (ABS)
- High Impact Polystyrene (HIPS)
- Low Density Polyethylene (LDPE)

Extrusion Lines

- 8 plastic lines with co-extrusion capabilities
- 6 rubber lines with co-extrusion capabilities

Tooling

- In-house tool and die
- In-house engineering

In-Line

- 3M Foam taping
- Heat Activated Tape (HAT) taping
- Cut-to-length (square ends only, no miters)
- Multi-purpose adhesive application
- Hot Melt application
- Texturing (graining or embossing)

Post-Processing

- Precision cut-to-length machines (square and angled cut)
- Vulcanizing, both straight splicing and corner joining
- Die cutting and press punching

Design.
Engineer.
Manufacture.



Custom Parts

As a leading manufacturer of plastic extrusions serving a wide range of industries, we offer custom parts with materials, sizes, shapes or colors different from what we regularly offer.

Our team of dedicated professionals can provide you with assistance to find a solution to your application. We will also help you with the design and with the samples.

Custom parts are subject to minimum order quantities.

TRIMCO

The Right Solution

We manufacture high-quality, competitively-priced custom production parts.




Edge Trims for furniture



Seals and Edge Trim for Enclosures




Seals and Edge Trim for HVAC

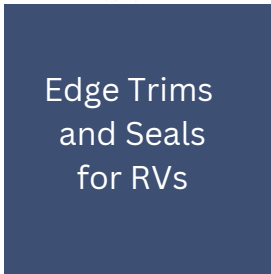

Edge Trims and Seals for RVs



Edge Trims and Seals for Airstream

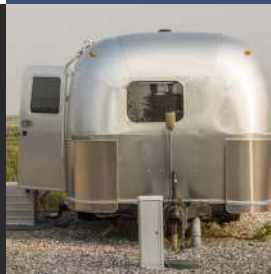


Edge Trims for boats



Edge Guards for heavy machinery




Seals for metallic Enclosures

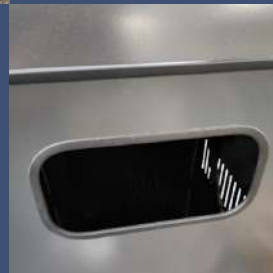


Edge trims for metallic frames



Edge Guards for wheelchairs

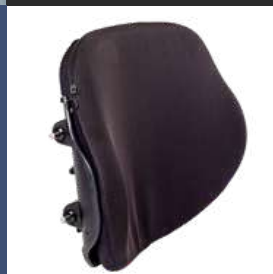

Edge trims for Spas

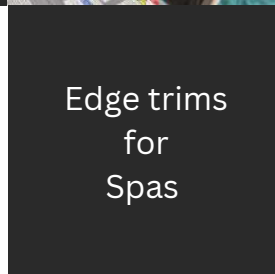

Whether you need to replace a factory component or need a custom...

Trimco
can help!

Industrial applications often require custom parts. Trimco has many years of experience working with clients and providing solutions.

Seals

Seals are ideal for shock absorption, cushioning and sealing. They will keep water, wind, noise, dust and vibration out from any place where you install them.

Trimco's Rubber Seals are made of **TPV**, is a high-performance thermoplastic vulcanizate used in industrial applications. It is resistant to flex fatigue, chemicals and extreme temperatures.

You can order our Seals with a simple transfer tape adhesive or a 3M Heat Activated Tape System (recommended). **This system does not require heat by end user.** The heat is applied at the factory to attach the tape to the seal, granting a strong bond between them.



Small Part. Big Impact.

The combination of our high-performance material and 3M Acrylic Foam Tape guarantees **durability for long-term efficiency**. Resist cold, UV light, temperature cycling, moisture and solvent. Our product is ready to seal against environmental conditions.



Technical Data Sheet

TPV - Thermoplastic Vulcanizate

General Information

Material Status	<ul style="list-style-type: none">• Commercial: Active
Features	<ul style="list-style-type: none">• Foamable• Low Density• Low Hardness
Uses	<ul style="list-style-type: none">• Industrial Applications• Construction Applications
Regulations	<ul style="list-style-type: none">• RoHS Compliant• REACH
Processing Method	<ul style="list-style-type: none">• Foam Extrusion• Profile Extrusion

HTA Tape


General Information

Material Status	<ul style="list-style-type: none">• Commercial: Active (3M™)
Adhesive	<ul style="list-style-type: none">• Heat-activated adhesive on the non-liner side
Liner	<ul style="list-style-type: none">• Red PE
Surfaces	<ul style="list-style-type: none">• ABS, Acciaio Inox, EPDM, Metal, Polycarbonate, Polystyrene, Santoprene (TPV), Thermoplastic polyolefins (TPO), Thermoplastic urethanes (TPU)
Uses	<ul style="list-style-type: none">• Industrial Applications• Automotive Applications


Featured Profiles




D-Profile
S1153 Series




D-Profile
S0110 Series




D-Profile
S0108 Series





D-Profile
S0109 Series




D-Profile
S0202 Series




D-Profile
S1750 Series



Ribbed Profile
S1705 Series



Ribbed Profile
S2897 Series




Trimco[®]

Profiles

Rubber Seals

Applications ideas: Doors, Windows, Skylights, Cabinets, Tool Boxes, All Types of Enclosures, medical components, electrical panels, trunk lids, storage access doors, etc.

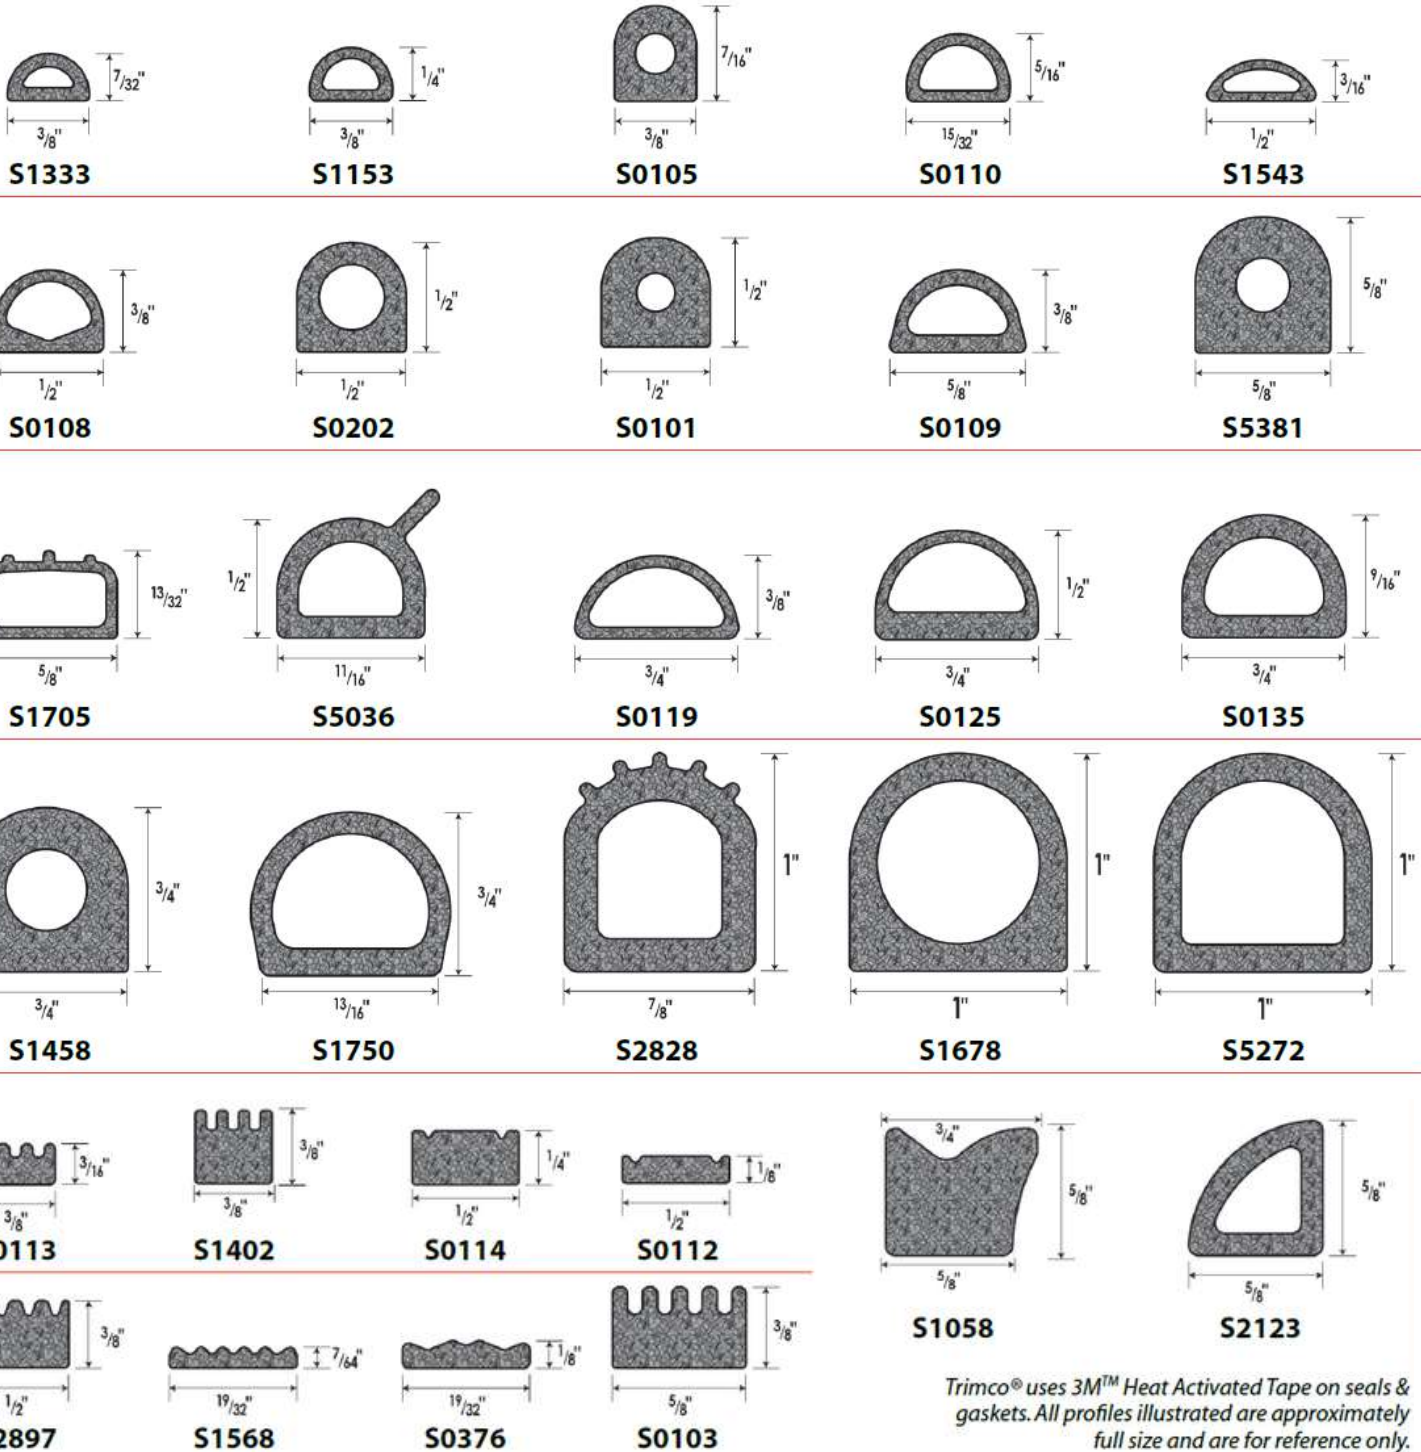

Trimco® uses 3M™ Heat Activated Tape on seals & gaskets. All profiles illustrated are approximately full size and are for reference only.

Profiles Chart

Profiles Specifications, Colors & Lengths Available

Seals

PROFILE SERIES	PROFILE SPECIFICATIONS	COLOR	LENGTH	TRIMCO PART NO.	Minimum Order Quantity M.O.Q.	UNITS / CTN
S0101	1/2" (12.7mm) (1/2"W x 1/2"H)	Black	500' (152.4m)	S0101H-500	6,000 ft	1
S0103	5/8" (15.9mm) (5/8"W x 3/8"H)	Black	500' (152.4M)	S0103H-500	7,500 ft	1
S0105	3/8" (9.5mm) (3/8"W x 7/16"H)	Black	500' (152.4m)	S0105H-500	6,000 ft	1
S0108	1/2" (12.7mm) (1/2"W x 3/8"H)	Black	500' (152.4M)	S0108H-500		1
S0109	5/8" (15.9mm) (5/8"W x 3/8"H)	Black	500' (152.4M)	S0109H-500		1
S0110	15/32" (12.0mm) (15/32"W x 5/16"H)	Black	500' (152.4M)	S0110H-500		1
S0112	1/2" (12.7mm) (1/2"W x 1/2"H)	Black	500' (152.4M)	S0112H-500	7,500 ft	1
S0113	3/8" (9.5mm) (3/8"W x 3/16"H)	Black	500' (152.4M)	S0113H-500	7,500 ft	1
S0114	1/2" (12.7mm) (1/2"W x 1/4"H)	Black	500' (152.4M)	S0114H-500	7,500 ft	1
S0119	3/4" (18.7mm) (3/4"W x 3/8"H)	Black	500' (152.4M)	S0119H-500		1
S0125	3/4" (18.7mm) (3/4"W x 1/2"H)	Black	250' (76.2M)	S0125H-250	7,500 ft	1
S0135	3/4" (18.7mm) (3/4"W x 9/16"H)	Black	250' (76.2M)	S0135H-250		1
S0202	1/2" (12.7mm) (1/2"W x 1/2"H)	Black	500' (152.4M)	S0202H-500		1
S0376	19/32" (15.1mm) (19/32"W x 1/8"H)	Black	500' (152.4M)	S0376H-500	7,500 ft	1
S1058	5/8" (15.9mm) (5/8"W x 5/8"H x 3/4")	Black	250' (76.2M)	S1058H-250	6,000 ft	1
S1153	3/8" (9.5mm) (3/8"W x 1/4"H)	Black	500' (152.4M)	S1153H-500		1
S1333	3/8" (9.5mm) (3/8"W x 7/32"H)	Black	500' (152.4M)	S1333H-500	7,500 ft	1
S1402	3/8" (9.5mm) (3/8"W x 3/8"H)	Black	500' (152.4M)	S1402H-500	7,500 ft	1

Profiles Chart

Profiles Specifications, Colors & Lengths Available

Seals

PROFILE SERIES	PROFILE SPECIFICATIONS	COLOR	LENGTH	TRIMCO PART NO.	Minimum Order Quantity M.O.Q.	UNITS / CTN
S1458	3/4" (18.7mm) (3/4"W x 3/4"H)	Black	200' (60.1M)	S1458H-200	6,000 ft	1
S1543	1/2" (12.7mm) (1/2"W x 3/16"H)	Black	500' (152.4M)	S1543H-500	7,500 ft	1
S1568	19/32" (15.1mm) (19/32"W x 7/64"H)	Black	500' (152.4M)	S1568T-500	7,500 ft	1
S1678	1.0" (25.4mm) (1"W x 1"H)	Black	125' (38.1M)	S1678H-125	6,000 ft	1
S1705	5/8" (15.9mm) (5/8"W x 13/32"H)	Black	500' (152.4M)	S1705H-500	7,500 ft	1
S1750	13/16" (20.6mm) (11/16"W x 3/4"H)	Black	200' (60.1M)	S1750H-200	6,000 ft	1
S2123	5/8" (15.9mm) (5/8"W x 5/8"H)	Black	250' (76.2M)	S2123T-250	6,000 ft	1
S2828	7/8" (22.2mm) (7/8"W x 1"H)	Black	100' (38.1M)	S2828H-125	6,000 ft	1
S2897	1/2" (12.7mm) (1/2"W x 3/8"H)	Black	500' (152.4M)	S2897H-500	7,500 ft	1
S5036	11/16" (16.2mm) (11/16"W x 1/2"H)	Black	250' (76.2M)	S5036H-250	7,500 ft	1
S5272	1.0" (25.4mm) (1"W x 1"H)	Black	125' (38.1M)	S5272H-125	6,000 ft	1
S5381	5/8" (15.9mm) (5/8"W x 5/8"H)	Black	250' (76.2M)	S5381H-250	6,000 ft	1

Warranty / Garantie / Garantía

Trimco® (a division of Trim-Gard) products are warranted to be free of defect(s) in material and workmanship for 12 months from the date of manufacturing (excluding Seals & Gaskets). Chrome trim with top cap must have all cut ends sealed with TG End Sealer to maximize weather ability and validate the warranty. The material must be applied as per instruction. Any material deemed defective by the manufacturer will be replaced on a one-for-one footage basis upon proper authorization and presentation of the defective material. No labor costs will be honored. The manufacturer accepts no responsibility for any damage resulting from the installation or removal of our products.

* CUSTOMER MUST DETERMINE SUITABILITY AND FIT FOR EACH APPLICATION *

TERMS

April 3, 2023 terms to supersede all prior terms
Net 30 days (on credit approval) 2% per month charged on overdue accounts

RETURNS

All returned material must have written authorization and be returned freight prepaid. All returned merchandise (must have an invoice date no older than 6 months), color, and/or profile is subject to a 20% restocking fee. No cash refunds on returned goods. Exchange only

CLAIMS - LOSS & SHORTAGE

Any claims for product shortage or errors must be submitted to Trimco in writing within five (5) business days of receipt of shipment. Any claims for loss or damage in transit must be made directly to the delivery carrier. The loss must be noted on the delivery receipt.

Les produits Trimco (une division de Trim-Gard) sont garantis sans défaut (s) de matériel et de main d'œuvre pendant 12 mois à partir de la date de fabrication (à l'exclusion des joints et des joints). La garniture chromée avec capuchon supérieur doit avoir toutes les extrémités coupées scellées à l'aide d'un scellant d'extrémité TG pour maximiser la météo et valider la garantie. Le matériel doit être appliqué selon les instructions. Tout matériel défectueux par le fabricant sera remplacé sur une base de pied un pour un sur une autorisation et une présentation appropriées du matériel défectueux. Aucun frais de main d'œuvre ou de fret ne sera honoré. Le fabricant n'accepte aucune responsabilité pour tout dommage résultant de l'installation ou du retrait d'une (des) moulure(s).

"LE CLIENT DOIT DÉTERMINER L'ADÉQUATION ET L'ADAPTATION À CHAQUE APPLICATION"

TERMES

3 Avril, 2023 conditions pour supprimer toutes les conditions antérieures
Net 30 jours (sur approbation de crédit) 2% par mois facturé sur les comptes en retard

RETOUR

Tout le matériel retourné doit avoir une autorisation écrite et être retourné fret prépayé. Toutes les marchandises retournées (doivent avoir une date de facturation ne dépassant pas 6 mois), de la couleur et/ou du profil sont soumises à des frais de restauration de 20%. Aucun remboursement en espèces sur les marchandises retournées. Échange uniquement

RÉCLAMATIONS - PERTE ET PÉNURIE

Toute réclamation pour pénurie de produit ou erreur doit être soumise à trimco ini par écrit dans les cinq (5) jours ouvrables de la réception de l'expédition. Toute réclamation pour perte ou dommage en transit doit être faite directement au transporteur de livraison. La perte doit être indiquée sur le reçu de livraison.

Se garantiza que los productos de Trimco (una división de Trim-Gard) están libres de defectos de material y mano de obra durante 12 meses a partir de la fecha de fabricación (excluyendo sellos y juntas). La moldura cromada con tapa superior debe tener todos los extremos cortados sellados con un sellador de extremos tg para maximizar la resistencia a la intemperie y validar la garantía. El material debe aplicarse según las instrucciones. Cualquier material considerado defectuoso por el fabricante será reemplazado en pie de pie de uno por uno con la autorización y presentación apropiadas del material defectuoso. Ningún costo de mano de obra o de flete será honrado. El fabricante no acepta responsabilidad por cualquier daño resultado de la instalación o el retiro de una moldura (s).

"EL CLIENTE DEBE DETERMINAR LA ADECUACIÓN Y EL ADECUADO PARA CADA APLICACIÓN "

CONDICIONES

Los términos del 3 de abril de 2023 supercederán todos los términos anteriores.
30 días netos (con la aprobación de crédito) 2% mensual cargado en cuentas vencidas.

DEVOLUCIONES

Todo el material devuelto debe tener autorización por escrito y ser devuelto con flete prepagado. Toda la mercancía devuelta con una antigüedad no mayor a 6 meses desde la fecha de facturación, color y/o perfil están sujetos a una tarifa de reposición del 20%. No hay reembolsos en efectivo de los bienes devueltos. Sólo intercambio.

RECLAMOS - PÉRDIDA Y ESCASEZ

Cualquier reclamo por escasez de productos o errores debe enviarse a trimco ini por escrito dentro de los cinco (5) días hábiles de recibir el envío. Cualquier reclamo por pérdida o daño en tránsito debe hacerse directamente al transportista. La pérdida se debe anotar en el recibo de entrega.

Contact Us



OUR MAIN OFFICE

9823 State Highway 53 N
Upper Sandusky, OH 43351



PHONE NUMBER

Toll Free: 800-257-2289
Fax: 419-294-1221



EMAIL & WEBSITE

sales@trimco.info
www.trimco.info

SOCIAL MEDIA



[@trimco.info](https://www.instagram.com/trimco.info)



[trimco.info](https://www.facebook.com/trimco.info)



[Trimco a Division
of Trim-Gard](#)



[@trimcomanufacturing](https://www.youtube.com/@trimcomanufacturing)

Need Samples?

If you are a dealer, wholesaler, distributor, or looking for a custom part for your project, we'd love to send you samples of our products.

Get in touch!